

SMS PROJECTOR WL SHORT THROW V+



All light on the projection screen, not into the speaker's eyes.
A wall bracket for projectors with short projection distances. Highly flexible adjustments ensure the best image quality in all situations. The projector slide is precision-manufactured for each model of projector, and can be displaced along the complete column length for adjusting depth. Furthermore, the wall screen can be adjusted both horizontally and vertically. Fine adjustment is quick and easy using adjustment knobs on the slide.

- | | | | |
|--|--|------------------------------|--|
| <input type="radio"/> Ceiling | <input type="radio"/> Heavy weight | <input type="radio"/> Fixed | <input checked="" type="radio"/> Variable |
| <input checked="" type="radio"/> Wall | <input type="radio"/> Middle weight | <input type="radio"/> Swivel | <input type="radio"/> UniSlide |
| <input type="radio"/> Floor | <input checked="" type="radio"/> Light weight | <input type="radio"/> Tilt | <input type="radio"/> Hidden |
| <input type="radio"/> Table | | <input type="radio"/> 3D | <input type="radio"/> Double |
| | | <input type="radio"/> Mobile | |

SMS PROJECTOR WL SHORT THROW V+

INFO

- Finish: Aluminium/black/silver.
- Maximum load: 12 kg
- Length: 680, 1450 and 1600 mm.
- Tilt: $\pm 15^\circ$, plus fine adjustment vertically and horizontally.
- Adjustable: the wall plate can be adjusted ± 25 mm both horizontally and vertically, and the projector can be mounted at any position along the complete column.

Additional information: cables are simply and discretely hidden within the profiled column.

ARTICLE NO.

AE013008-P1
AE013010V2-P1
AE013011V2-P1
AE013012V2-P1
AE013014V2-P1
AE013015V2-P1
AE013016V2-P1
AE013017V2-P1
AE013018V2-P1
AE013019V2-P1

DESCRIPTION


SMS Projector WL Short Throw V+ Epson EMP400W/We
SMS Projector WL Short Throw V+ Hitachi A100/A110
SMS Projector WL Short Throw V+ Optoma EX525
SMS Projector WL Short Throw V+ Toshiba EX20/EW25
SMS Projector WL Short Throw V+ NEC WT600/610
SMS Projector WL Short Throw V+ Sanyo XL50/XL51
SMS Projector WL Short Throw V+ Mitsubishi XD500
SMS Projector WL Short Throw V+ BenQ MP512/522/771
SMS Projector WL Short Throw V+ Sanyo PLC-XL45
SMS Projector WL Short Throw V+ NEC NP600S/500WS

FS000680-P2
FS001450-P2
FS001600-P2

SMS Projector Short Throw 680 mm
SMS Projector Short Throw 1450 mm
SMS Projector Short Throw 1600 mm

RECOMMENDED COLUMN LENGTHS

Hitachi	L=680 mm	Sanyo	L=680/1450 mm
Mitsubishi	L=1450 mm	Toshiba	L=1450 mm
NEC	L=680/1450/1600 mm	Ben Q	L=1450/1600 mm
Optoma	L=1450 mm	Epson	L=1450 mm

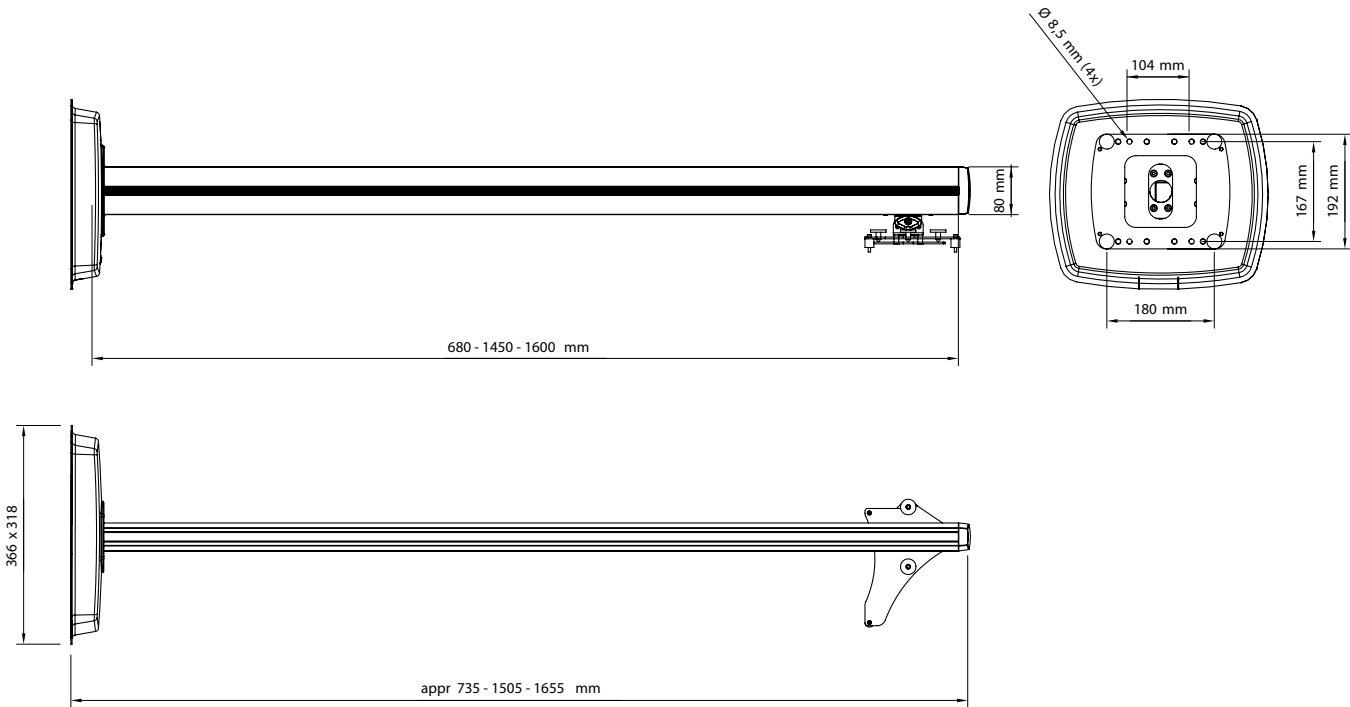

www.SmartMediaSolutions.se